CONNECTION HEAD - type XD-SDFwin

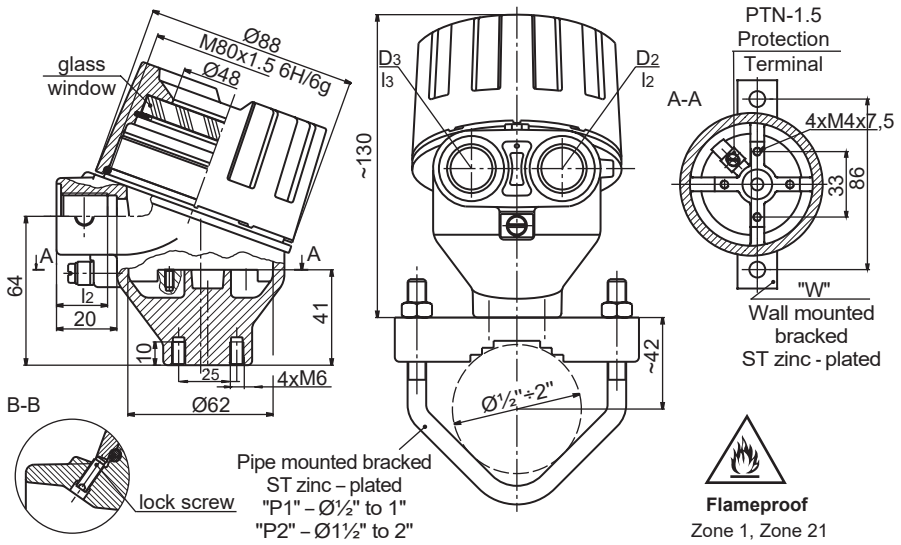

Kg
~1,30 Kg

33

Flameproof
Zone 1, Zone 21
Zone 2, Zone 22

FTZU 14 ATEX 0004U
I M2 Ex db IMb
II 2 G Ex db II C Gb
II 2D Ex tb IIIC Db

IECEx FTZU 17.0008U
Ex db IMb
Ex db II C Gb
Ex tb IIIC Db

		ORDERING CODE			SPECIFICATION
(1)	XD-SDFwin				
(2)	Material of elements	4			Metal parts - stainless steel; seals - silicone rubber
		5			Metal parts - stainless steel; seals - fluoroelastomer rubber
(3)	Cable gland thread D_2/ D_3 Please choose two variants of thread, separately for D_2 and D_3 **For example: XD-SDFwin-4-M2/CD...**	M2			M20x1.5 6H
		G2			G½; BSP½ (without cert.)
		G3			G¾; BSP¾ (without cert.)
		G4			G⅜; BSP⅜ (without cert.)
		N2			½NPTmod - modified ac. to OIT-17/03
		N3			¾NPTmod - modified ac. to OIT-17/03
		CD			CD = closed (D_3 only)
(10)	Bracket type		W		Fixing on a wall
			P		Fixing on a pipe
			X		Without bracket

Maine features:

- material of body and cover: stainless steel DIN 1.4401, AISI 316
- service temperature:
  T_{serv}= -50÷85°C - silicone rubber
  T_{serv} = -20 to 85°C - fluoroelastomer rubber
- maximum space for transmitter: Ø58×35mm

Ordering example:

(1)	(2)	(3)	(10)
XD-SDFwin	4 -	M2/CD +	W