
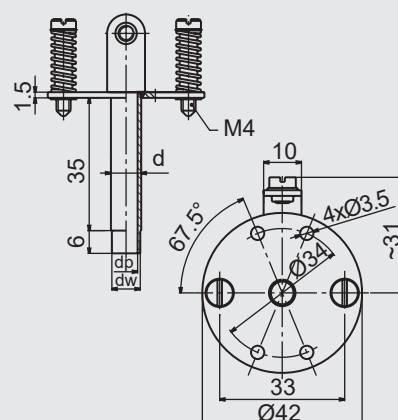


LONG BUSH SPRINGING DISK TYPE - „B”

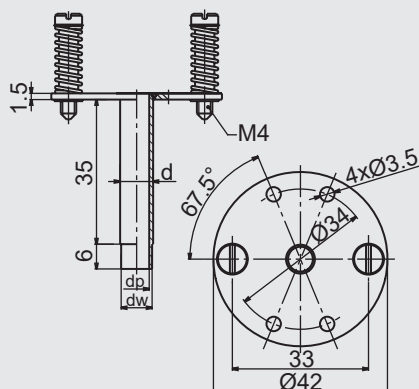

TYPE: BSDB3L-d_c

TYPE: BSDGB3L-d_c

MINERAL INSULATED CABLE DIAMETER d _c	d [mm]	d _p [mm]	d _w [mm]	d [mm]	d _p [mm]	d _w [mm]
Ø3	Ø6	Ø3.3 ^{+0.1}	Ø4	Ø6	Ø3.3 ^{+0.1}	Ø4
Ø4.5	Ø6	Ø4.54 ^{+0.1}	Ø5.5	Ø6	Ø4.54 ^{+0.1}	Ø5.5
Ø6	Ø8	Ø6.06 ^{+0.1}	Ø7.4	Ø8	Ø6.06 ^{+0.1}	Ø7.4
Ø8	Ø10	Ø8.08 ^{+0.1}	Ø9.8	Ø10	Ø8.08 ^{+0.1}	Ø9.8
Ø9.525	Ø12	Ø9.62 ^{+0.1}	Ø11.8	Ø12	Ø9.62 ^{+0.1}	Ø11.8
Ø10	Ø12	Ø10.1 ^{+0.1}	Ø11.8	Ø12	Ø10.1 ^{+0.1}	Ø11.8
Ø12.7	Ø15	Ø12.82 ^{+0.1}	Ø14.8	Ø15	Ø12.82 ^{+0.1}	Ø14.8

SPECIFICATION

Disk	Stainless steel
Spring	Zinc - plated spring steel
Screw	Stainless steel
Distance bush	Nickel - plated brass

ORDERING

Ordering	Bush transmitter disk BSDB3L - d_c	Bush transmitter disk BSDGB3L-d_c
Ordering example	Bush transmitter disk BSDB3L - Ø6	Bush transmitter disk BSDGB3L-Ø6