
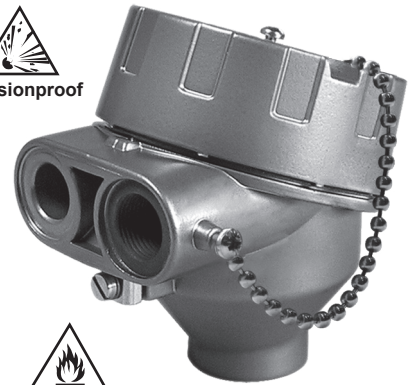


CONNECTION HEAD - type XD-AD

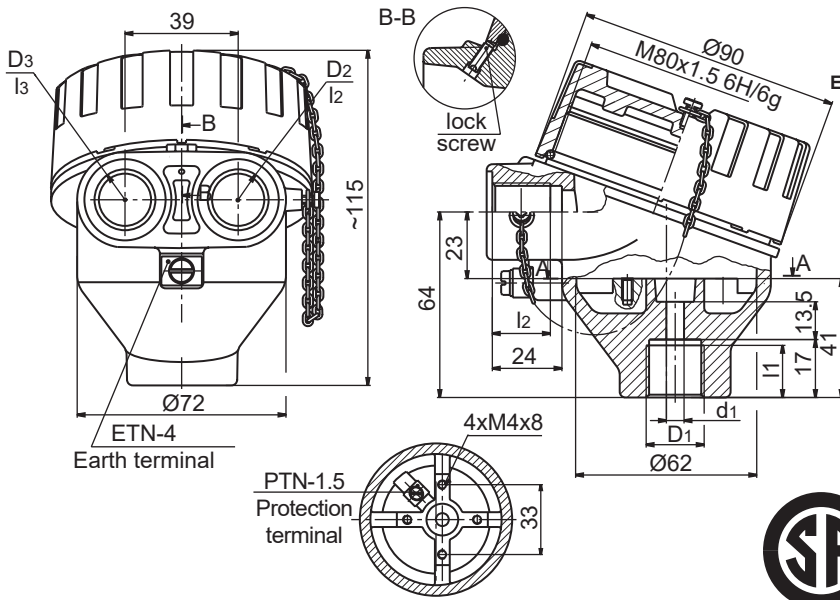

EX HEADS

06

(1)	XD-AD	ORDERING CODE	SPECIFICATION
(2)	Material of elements	4	Metal parts - stainless steel; seals - silicone rubber
		5	Metal parts - stainless steel; seals - fluoroelastomer rubber
(3)	Cable gland thread D ₂ /D ₃ Please choose two variants of thread, separately for D ₂ and D ₃ For example: XD-AD-4-M2/CD...	M2	M20x1.5 6H
		N2	½NPTmod - modified ac. to FM3615 and CSA C22.2 No. 0.5
		N3	¾NPTmod - modified ac. to FM3615 and CSA C22.2 No. 0.5
		CD	CD = closed (D ₃ only)
(4)	Type of process thread D ₁	M2	M20x1.5 6H
		M24	M24x1.5 6H
		M27	M27x2 6H
		N2	½NPTmod - modified ac. to FM3615 and CSA C22.2 No. 0.5
(4)		N3	¾NPTmod - modified ac. to FM3615 and CSA C22.2 No. 0.5
(5)	Symbol of hole d ₁ diameter	13	Ø13 or other hole on request (non flameproof)
(8)	Paint type	C	Creodur - Rafil
		SE	Spray epoxy
		SPU	Spray polyurethane on (SE) layer
(9)	Paint colour	al	alu natural colour (only Creodur - Rafil)
		yc	RAL 1007 daffodil yellow
		ys	RAL 1003 signal yellow
		bs	RAL 5005 signal blue
		sb	RAL 5015 sky blue
		sg	RAL 7032 pebble grey
		gr	RAL 7035 light grey
		ag	RAL 9002 grey white
		sh	RAL 9006 white aluminium
		gs	RAL 9007 grey aluminium
cw	RAL 9010 pure white		

Main features:

- material of body and cover - aluminium pressure die-castings, max 0.5%Mg
- service temperature:
T_{serv} = -50+150°C - silicone rubber
T_{serv} = -20+200°C - fluoroelastomer rubber
- maximum space for transmitter: Ø52x30mm
- coating: yellow chromating (optionally) and chemically resistant paint (outside only)

Material: aluminium EN AC 44200mod

EN AC 44200mod - the kind of material meets the requirements for use in potentially explosive areas. In addition, it is characterized by increased strength (pressure) parameters, while at the same time shows reduced copper (Cu) concentration.

Ordering example:

(1) (2) (3) (4) (5) (8) (9)
XD-AD 4 - M2/CD - M24/8.1 - SE sh